





# High Pressure Gas Quench

Vacuum Furnaces  
VPT and VVPT series


**N<sub>2</sub>, Ar, He**  
**2-6-10-15-25 bar**

- High pressure gas quenching of:
  - Hot working tool steels
  - Cold working tool steels
  - High speed steels
- Oil hardened steel grades (AISI type O1, O2, O6, O7, 4140, 4340, 300M, etc.)
- Vacuum Carburizing by FineCarb® and PreNitLPC® technologies
- Tempering, annealing, solution heat treating of super alloys, brazing and sintering

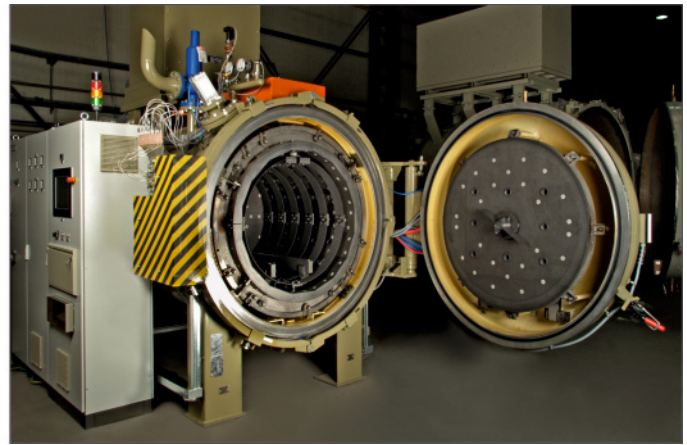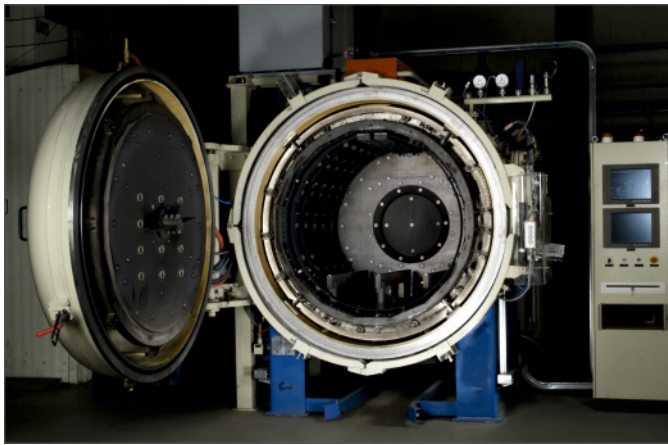

## Advantages of HPGQ vacuum furnaces:

- Shorter cycle time, increased throughput and precise monitoring of the process.
- Compact design with internal gas cooling system:
  - reduces power and gas consumption,
  - reduces installation area,
  - reduces installation and start up time.
- Compact pumping system with easy access for maintenance.
- Door locking system with a clamping ring and lip seal engineered for high pressure operation and improved life time.
- Cylindrical heating chamber enables heat treating of oversized loads.
- Light and curved graphite heating elements surround the load from all sides, provide fast and uniform heating throughout the working space; they are made per latest technologies providing reliable and prolonged life time of the heating system.
- Temperature uniformity according to AMS 2750D, better than  $\pm 5^{\circ}\text{C}$  (or  $\pm 3^{\circ}\text{C}$  at austenitization temperature); the furnace is equipped with test ports for SAT and TUS sensors. The furnace meets SAT and TUS requirements in accordance with AMS 2750D.
- Efficient cooling system with profiled distributed around the heating chamber and door provides for uniform quenching.
- Patented convection heating system with pneumatically driven gas nozzles flaps assure smooth operation of the system even under work environment contaminated with sublimatem.
  - ConFlap™ system enhances convection heating and provides for 40% time savings when heating densely packed loads in the  $800^{\circ}\text{C}$  temperature range.
  - Convection heating system enables tempering of the load in one process, thus making the furnace more flexible.
- Fast and uniform cooling throughout the load in one process, thus making the furnace more flexible. Nozzle flaps enable different cooling patterns. Depending on the load configuration, it can be quenched with gas flow from all nozzles, or directionally from top and bottom, or from sides only.
- Superior quenching rate and uniform gas flow through the load, makes the furnace a perfect tool for heat treatment of low alloyed steels, carburized and HSLA steels.
- The furnaces meet AMS 2750D, AMS 2769 standards as well as European and US safety requirements.

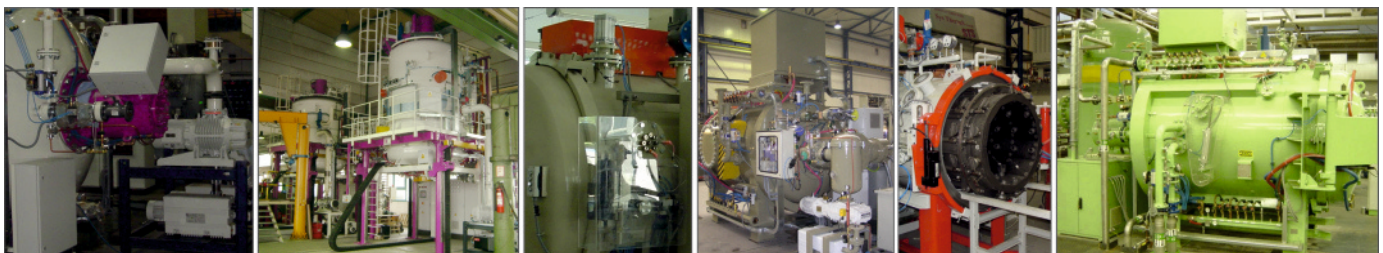




# High Pressure Gas Quench Vacuum Furnaces

VPT and VVPT series

- Optionally available with FineCarb® carburizing with pre-nitriding PreNitLPC® and vacuum nitriding FineLPN.
- Available with horizontal and vertical loading configuration.
- Available with auto-controlled isothermal quenching (martempering) package, supported by convection heating for precise temperature control; essential feature in present days thermal processing of dies.
- Bainitic quenching technology available for FineCarb® results in reduced hardening distortions.
- Furnaces exceeds the requirements of GM and Ford norms (DC9999-1, AMTDDC2010) for heat treatment of H13 steel with cooling rate up to 120°C/min.

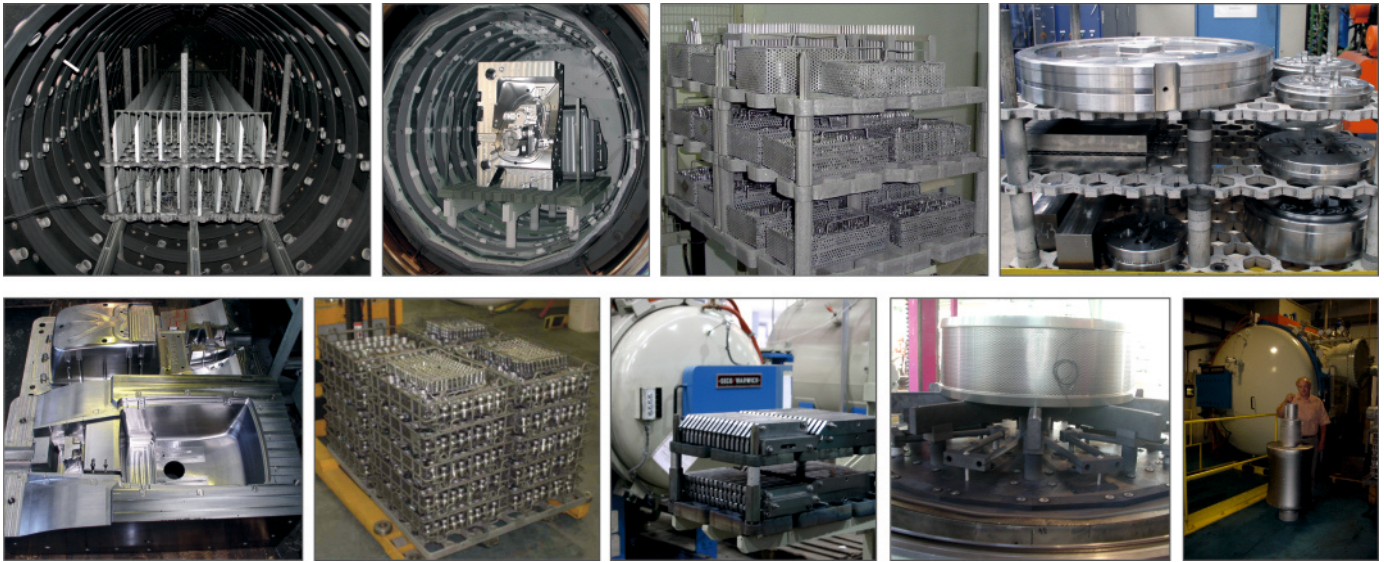

## Control system advantages

- Fully automated furnace operation controlled by PLC (Programmable Logic Controller) and IPC (Industrial PC-class computer).
- LCD touch screen visually displays all technological parameters of heat treatment processes.
- Large capacity of a hard disc (HDD) recording of unlimited number of recipes. It eliminates errors resulting from creating new recipes by a furnace operator.
- All process data are recorded, and can be displayed as a diagrams on a separate screen or saved on HDD or a CD.
- Export of historical data and alarm messages to external system for further analysis (e.g. to \*.csv files).
- Easy integration with any data base.
- The furnace is equipped with the internal Ethernet network; remote furnace service is available through Internet or modem connection using dedicated software.
- Optionally the control system can be equipped with advanced batch reporting and history analyzing software which can present data using templates for standard MS Office applications, such as Word and Excel.
- A separate diagnostic screen reminds about maintenance requirements of individual components of the furnace.
- Energy efficient Power Management System to control heating and cooling capacity of the furnaces.
- SimVac simulation software supporting FineCarb® and PreNit® vacuum carburizing technologies.
- G-Quench Pro software for simulation of hardness of tool steels.



## Technical data

		VPT horizontal					VVPT-EH vertical	
		22/24	25/24	35/36	50/48	56/60	50/50	60/60
<b>Uniform zone (WxHxL)</b>	<b>mm</b>	400x400x600	600x400x600	600x600x900	900x800x1200	1000x1000x1500	Ø1250x1250	Ø1500x1500
<b>Max. load</b>	<b>kg</b>	200	400	600	1200	2500	1500	2000
<b>Operating temperature</b>	<b>°C</b>	200 – 1350						
<b>Convection heating</b>	<b>°C</b>	max 800 (optional 1100)						
<b>Temperature uniformity</b>	<b>°C</b>	+/- 5						
<b>Heating power</b>	<b>kW</b>	70	90	150	240	375	270	375
<b>Max. cooling pressure</b>	<b>bar</b>	2-6-10-12-15-25						
<b>Operating vacuum</b>	<b>mbar</b>	10 <sup>-2</sup> range (optional 10 <sup>-4</sup> )						

\* other sizes available on request



22/24



35/36



50/48



56/60



60/60



SECO/WARWICK Group

POLAND  
SECO/WARWICK S.A.  
Sobieskiego 8  
66-200 Świebodzin, Poland  
tel. +48 68 3820 500  
fax +48 68 3820 555  
info@secowarwick.com.pl  
www.secowarwick.com

POLAND  
SECO/WARWICK Europe Sp. z o.o.  
Świerczewskiego 76  
66-200 Świebodzin, Poland  
tel. +48 68 3819 800  
fax +48 68 3819 805  
europe@secowarwick.com.pl  
www.secowarwick.com

USA  
SECO/WARWICK Corp.  
P.O. Box 908  
Meadville, PA 16335-6908, USA  
tel. +1 814 332 8400  
fax +1 814 724 1407  
info@secowarwick.com  
www.secowarwick.com

USA  
RETECH SYSTEMS LLC  
100 Henry Station Rd.  
Ukiah, CA 95482, USA  
tel. +1 707 462 6522  
fax +1 707 462 4103  
leroy.b.leland@retechsystemsllc.com  
www.retechsystemsllc.com

GERMANY  
SECO/WARWICK Service GmbH  
An der Molkerei 15  
D-47551 Bedburg-Hau, Germany  
tel. +49 (2821) 713 100  
fax +49 (2821) 713 10-29  
service@secowarwick.com  
www.secowarwick.com

CHINA  
SECO/WARWICK RETECH  
Thermal Equipment Manufacturing  
(Tianjin) Co., Ltd.  
7B Second Xeda Road  
Tianjin, China 300385  
tel. +86 22 238 28 300  
fax +86 22 238 28 305  
china@secowarwick.com  
www.swretech.com.cn

INDIA  
SECO WARWICK Allied Pvt. Ltd.  
5th Floor, Amfotech It Park  
Road No. 8, Wagle Estate  
Thane (W) - 400 604, India  
tel. +91 22 6730 1400  
fax +91 22 6730 1488  
swa-info@secowarwick.com  
www.secowarwick.com

BRAZIL  
SECO/WARWICK do Brasil Industria  
de Fornos Ltda.  
Parque Industrial II  
Jundiaí, SP - Brasil  
CEP: 13213-170  
tel. +55 (11) 3109-5900  
fax +55 11 4525-1047  
vendas@secowarwick.com  
www.secowarwick.com

RUSSIA  
SECO/WARWICK Rus Office  
Pyzhevskiy pereulok, bld 5/1,  
office № 400  
119017 Moscow, Russia  
tel. +7 499 788 9721  
moscow@secowarwick.com.pl  
www.secowarwick.com

BELARUS  
SECO/WARWICK OOO Minsk Office  
8 Mielnikajte str., office 26  
220004 Mińsk, Belarus  
tel./fax: + 375 17306 23 71  
secom@infonet.by  
www.secowarwick.com